



### European eCall System.


The European commission will implement the automatic emergency call system eCall by the end of 2010. The system provides information about position of the car, damage and allows the injured person to talk to an emergency call centre. Emergency services are informed much in advance before they arrive at the place of accident.

### Battery challenge.

The combination of GPS and GSM system and the need to have sensor data from various positions inside the car requires an independent and powerful battery that is able to reliably work in the harsh automotive environment over the extended temperature range. Battery must be robust to withstand car crash and be steadily available at any time.

### Technical solution

The V500HT cell out of the powerful85 family of Ni-MH button cells from VARTA Microbattery is specially designed for high discharge currents and extended temperature.

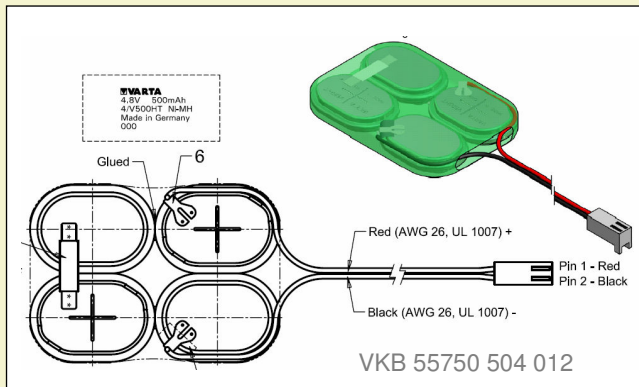

Characteristics	4/V500HT Battery
Voltage level	4.8V (other voltages possible)
Max peak discharge current	3A
Capacity	500mAh
Discharge Temperature range	-20C to +85C
Overcharge capability	0.03CA continuous
Weight	56g

### eCall Battery

VARTA Microbattery's Ni-MH HRT batteries (powerful85 family) offer rechargeable battery solutions with reliable power for supplying GPS and GSM Module in case of emergency or accident. Recommended configurations: 4/V500HT or 5/V500HT depending on temperature and power demand.

- wide temperature range -20 to +85C
- long lifetime – up to 10 years
- high reliability – by special sealing construction with new plastic materials
- high current capability
- design flexibility on voltage level from 1.2V to 12V
- design flexibility on battery shape side-by-side or stacked
- simple charging system continuous charging possible
- UL recognized cell
- environmentally friendly Ni-MH technology

## European eCall

VARTA Microbattery GmbH  
Daimlerstraße 1  
73479 Ellwangen/Germany  
Tel +49 79 61 921-280

[www.varta-microbattery.com](http://www.varta-microbattery.com)